




IAG Air / Oil Separator (AOS) Cruise Control Install Aid For 2002-05 WRX

Tools Required: Ratchet, extensions,
Sockets: 10mm
Saw: Reciprocating Saw or Chop Saw
Phillips screw driver / Screw Gun

The 2002-05 WRX 2.0L requires deleting or relocating the OEM cruise control module found on the passenger side strut tower. To retain cruise control the OEM bracket can be modified so the module is lower and the AOS can fit. Please see the illustrated instructions below on how to modify the bracket to retain cruise control.

Removal - Please read through the entire removal instructions before proceeding

1. Locate the cruise control module located on the passenger side strut tower.
2. Remove the (x4) 10mm screws holding the black bracket and module to the tower.

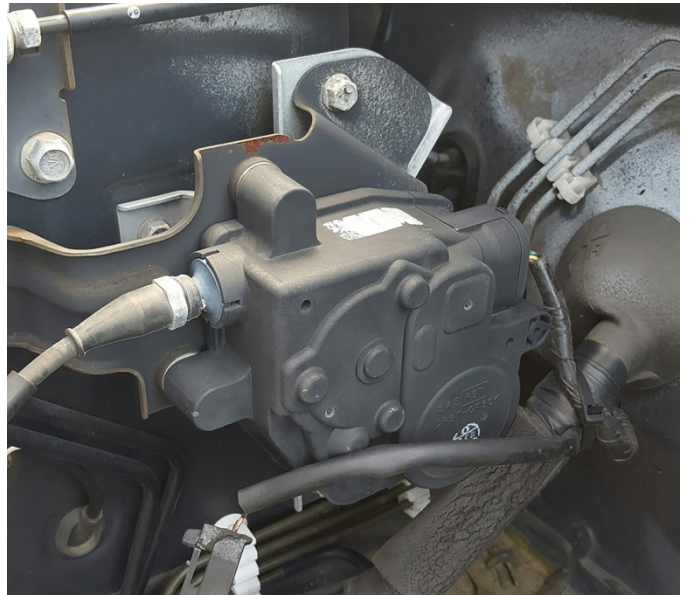




3. Remove the (x2) 10mm screws that hold the silver module bracket to the strut tower. Then remove the silver bracket from the vehicle.



4. Next using a Philips head screw driver or screw gun remove the (x3) screws holding the module to the black bracket.



5. Looking at the illustration note the yellow marks indicating where the black bracket requires trimming for reuse and relocation.

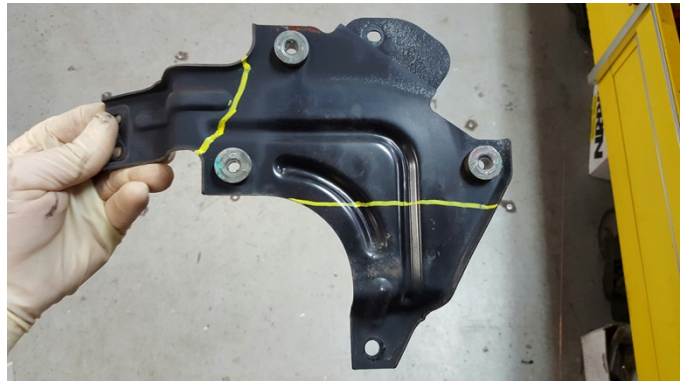

6. Using a reciprocating saw or chop saw, modify the bracket as shown.



7. Reattach the module to the modified black bracket using the original (x3) Philips head screws.



8. Using the OEM 10mm screws reattach the cruise control bracket to the strut tower to its new location as shown.

