



## IAG Street Series Air / Oil Separator (AOS) For 2015 WRX

### Part# IAG-ENG-7101

**Tools Required:** Ratchet, torque wrench, extensions, needle nose pliers, hose cutter, snips/scissors, flat head screw driver, hose clamping pliers  
 Sockets: 10mm, 12mm, 13mm, 19mm,  
 Wrenches:  $\frac{7}{8}$ " , 8mm, 10mm, 13mm, 3mm allen,  
 Other: Electrical Tape

Congratulations on the purchase of your Air/Oil Separator (AOS) and thank you for choosing IAG Performance. This installation manual is intended to guide you through the removal of the factory PCV system and the installation of the IAG AOS. If you already have an aftermarket catch can or AOS installed, please consult the specific instructions for your hardware to aid in its removal.



Parts List		
Part Name	Quantity	Notes
Air/Oil Separator	1	
Top Coolant Hose Assembly	1	41" Hose Length, $\frac{1}{2}$ " I.D., -8ORB
Bottom Coolant Hose Assembly	1	13" Hose Length, $\frac{1}{2}$ " I.D., -8ORB, $\frac{1}{2}$ " Straight Plastic Barb
Block Breather Hose Assembly	1	2.5" Hose to 90° Fitting to 42" $\frac{1}{2}$ " Hose
Drain & Lower Breather Hose Assembly	1	90° to Y Fitting / (x2) Hoses
Street Series Upper Breather Fitting & O-ring	1	Comes preinstalled
Street Series Vent Hose Assembly	1	$\frac{3}{8}$ " Hose to "Y" Fitting to (x2) $\frac{1}{2}$ " Hoses
Fasteners for Breather Top Fitting	3	M4x6mm
AOS Drain Fitting	1	Comes preinstalled
$\frac{1}{2}$ " Spring Clamp	1	Coolant Hose Spring Clamp
Mounting Bracket	1	
6x10mm Bolt	3	Mounting Bracket
6mm Washers	1	Mounting Bracket
8mm Washer	1	Mounting Bracket
5mm ID O-ring	1	
7mm ID O-ring	1	
$\frac{5}{8}$ " High Temp Rubber Cap	1	
8" Zip Tie	20	
ECU Relocation Bracket	1	
6x20mm Bolts	2	ECU Bracket
6mm Washers	2	ECU Bracket
$\frac{3}{8}$ " Plastic 90° Fitting	1	To AOS PCV
$\frac{3}{8}$ " Hose	1	21" Length / AOS PCV to 90° Fitting
$\frac{3}{8}$ " NPT to $\frac{3}{8}$ " Brass Barb Fitting	1	Block Breather Fitting PCV Replacement Fitting
For 2015 WRX+ Installs (Included in packaging)		
6mmx17mm Spacer	1	15+ WRX Install Only
8mmx27mm Spacer	1	15+ WRX Install Only
6x35mm Bolt	1	15+ WRX Install Only
8x45mm Bolt	1	15+ WRX Install Only



**Removal - Please read through the entire removal instructions before proceeding**

1. The engine needs to be completely cool before beginning work.
2. Disconnect the negative battery terminal using a 10mm wrench.



3. Using pop clip pliers remove the upper engine cover's (2) pop clips, then remove the cover from the vehicle.






4. Remove the (2) pop clips that hold the intake duct onto the upper core support, then remove the duct from the vehicle.





5. Next using a  $\frac{3}{8}$ " long extension, ratchet and 12mm socket remove the (2) 12mm bolts that hold the boost pipe to the turbo. Then using an 8mm socket loosen the clamp that holds the blow off valve. This can be done from above or below the car. If removing from underneath the car remove the OEM belly pan.

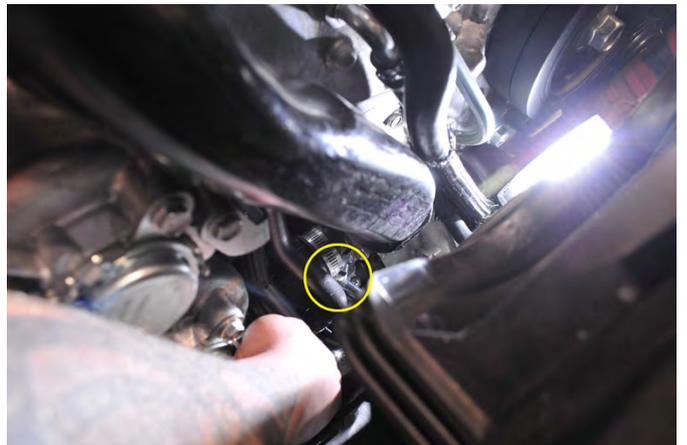

6. Using a flat head screw driver or 8mm socket and ratchet loosen the hose clamp that holds the boost pipe to the top mount intercooler. Remove the boost pipe from the vehicle by first pulling it free from the blow off valve. Then remove the pipe from the intercooler. If the rubber insert comes out reinsert it back into the pipe.





7. Using a 12mm socket, remove the intercooler mounting bolts on either side of the intercooler.




8. Loosen the hose clamp on the intercooler outlet. Then remove the intercooler from the vehicle being careful not to damage the fins or ac lines.





9. Using pop clip pliers remove the two pop clips that hold the breather pipe to the intake manifold.

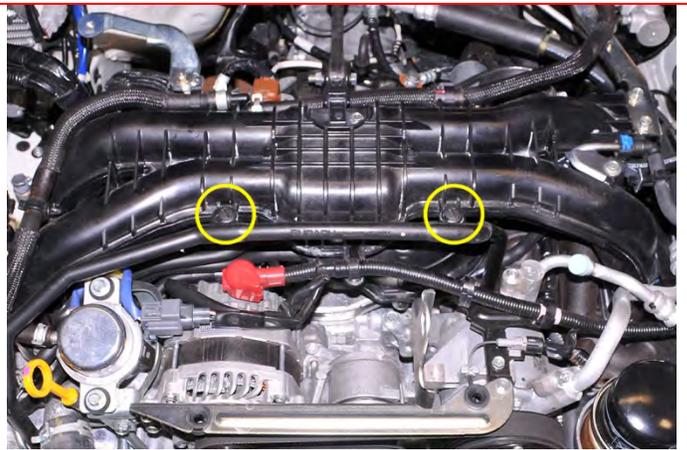


10. Using hose clamp pliers or needle nose pliers loosen the spring hose clamp on the breather pipe as shown. Then loosen the spring clamp that holds the breather to the inlet pipe. Finally remove the breather pipe from the engine retaining clip and remove the breather pipe from the engine.





11. Using a 12mm socket, 3" extension and ratchet, remove the (4) 12mm bolts that hold the EGR pipe on the EGR valve and intake manifold. Be careful not to lose or damage the metal gasket at the EGR valve as it is reused. Remove the pipe from the vehicle.

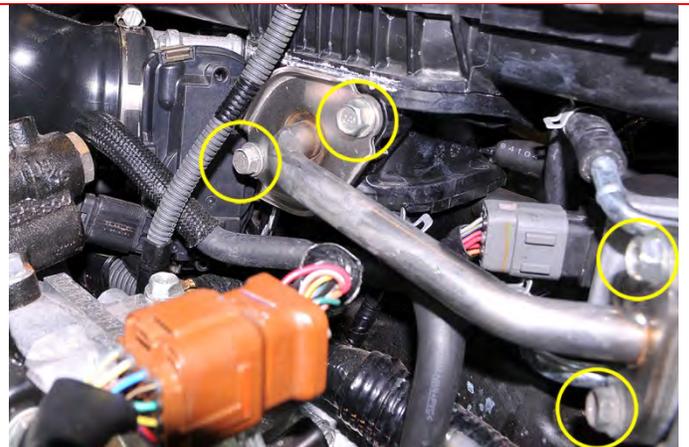



12. Using hose clamp or needle nose pliers loosen the spring clamp that attaches the PCV hose to the PCV valve.



13. Next pull the PCV hose free from the PCV valve and insert the  $\frac{3}{8}$ " plastic 90° fitting into the hose. Finally using the OEM spring clamp, secure the fitting in the hose.



14. Using a 19mm socket, 8" extension and ratchet remove the PCV valve from the engine short block.



15. Next thread into the block the supplied  $\frac{3}{8}$ " NPT to  $\frac{3}{8}$ " brass barb fitting. Using the 19mm socket, ratchet and extension torque the fitting to 15ft / lbs.






16. Remove the (4) wiring harness retaining clips from the ECU mounting bracket. Using needle nose pliers squeeze the locking tabs to free them from the bracket.




17. Using a 10mm socket, ratchet and 3" extension remove the (2) 10mm nuts that hold the ECU to the bracket. Then pull the ECU free from the bracket and place it aside in the engine bay.

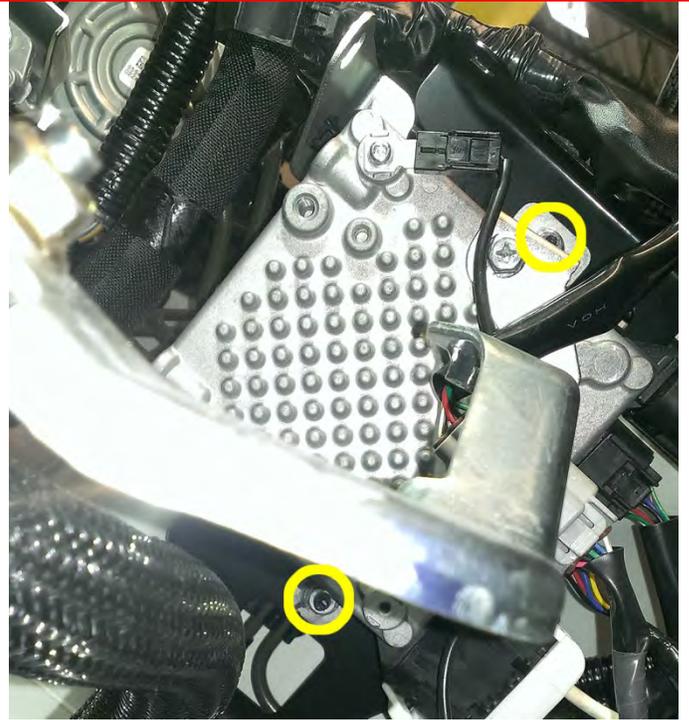

18. Remove the (2) 10mm bolts that hold the ECU bracket to the passenger side strut tower and frame rail as shown. Then remove the bracket from the vehicle.




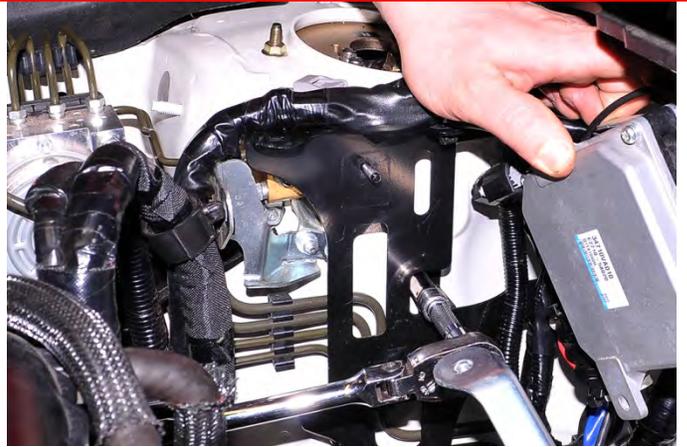


19. Pry out the small plastic plug located on the passenger side frame rail under the ground wire.




Next using 10mm socket and ratchet remove the 10mm

bolt that holds the ground wire to the upper frame rail. Then using needle nose pliers pull the retaining clip from the frame rail. Next relocate the ground wire to the lower frame bolt hole as shown using the OEM bolt. Tighten the bolt using a 10mm socket and ratchet.

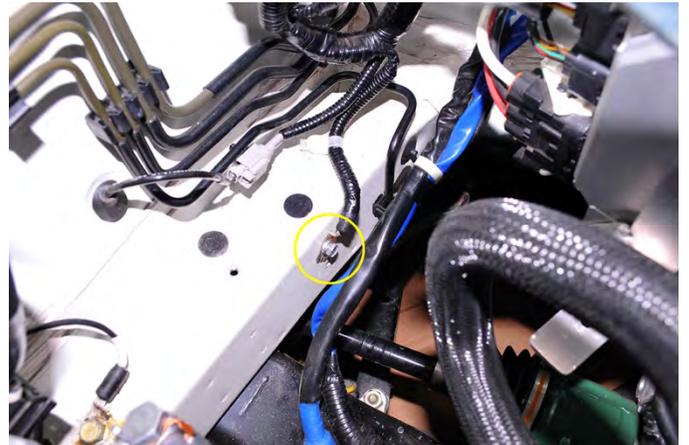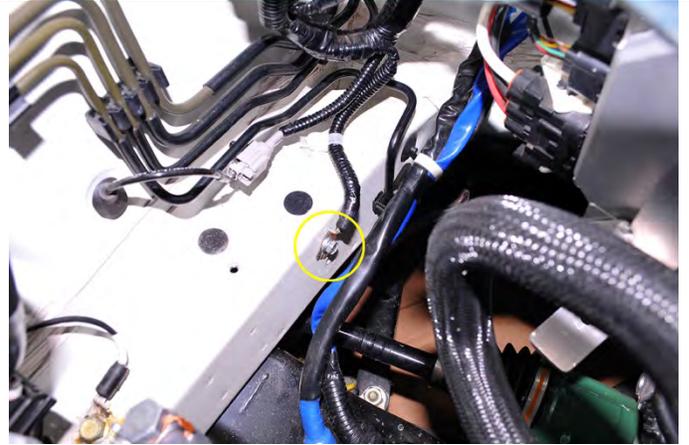


20. Relocate the ground wire to the lower frame bolt hole as shown using the OEM bolt. Tighten the bolt using a 10mm socket and ratchet.

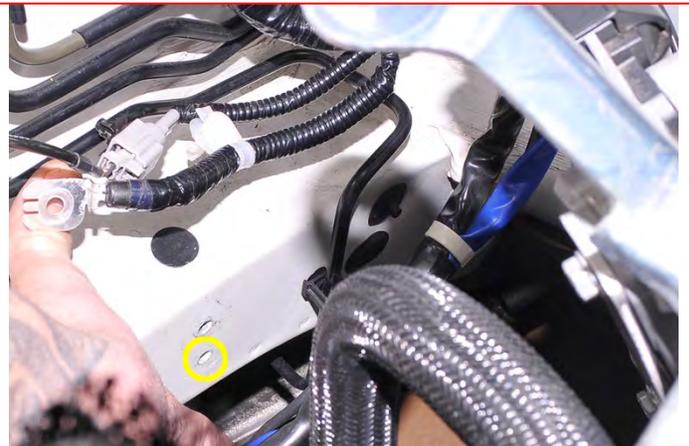



21. Locate the supplied ECU relocation bracket. Attach the bracket using the (2) 10mm bolts that held the original bracket to body of vehicle as shown. Using a 10mm socket, 8" extension and ratchet tighten the 10mm bolt on the top frame rail. Then using a 10mm socket and ratchet tighten the 10mm bolt on the side of the frame rail.

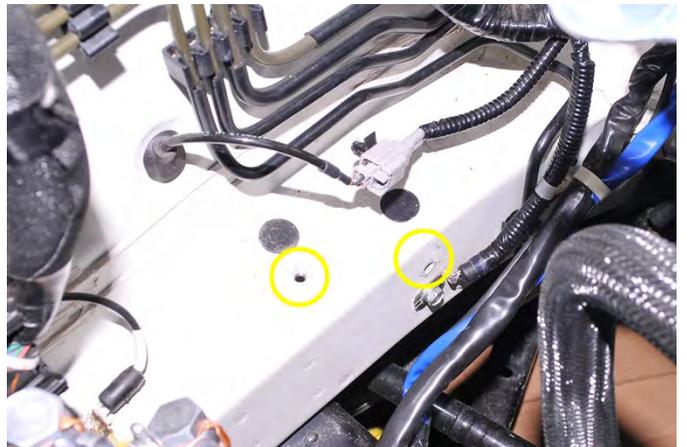



22. Using a 10mm socket and ratchet remove the 10mm bolt that secures the wiring harness onto the ECU.



Next remove the wiring retaining clip from the bracket and remove the bracket from the vehicle.






Finally using a zip tie secure the wiring as shown and trim the excess of the zip tie off with snips.



23. Locate the supplied (2) 6mm x 15mm bolts, (2) 6mm flat washers and the original (2) nuts that secured the ECU to the ECU bracket. Next using a 10mm socket, 3" extension, ratchet and 10mm wrench attach the ECU to the relocation bracket as shown. (Bolt head and washer on the bracket side, nuts on the ECU side)

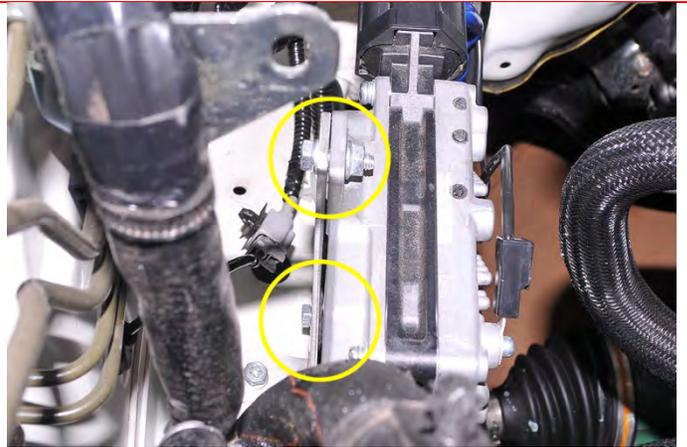

24. Next install the (2) AOS coolant lines onto the AOS (Lines come pre-assembled). \*\*The short line of the two attaches to the bottom of the AOS. Thread them on by hand and tighten using  $\frac{3}{8}$ " open end wrench.



25. Assemble the AOS mounting bracket. Locate the bracket the hardware bag. Install the included flat washers on each of the bolts. Place the bolts thru the bracket as shown. Next install the included spacers. The recessed portion of the spacer faces away from the bracket. Then install the O-rings onto the bolts to secure the spacers in place.



26. Install the bracket onto the AOS using the (3) small allen bolts as shown. The third hole from the bottom of the AOS should be oriented to the lowest allen bolt hole on the bracket. Tighten the three allens.




27. Locate the Street Series upper breather fitting and O-ring. Fit the O-ring onto the fitting as shown. Then insert the fitting on the top of the AOS.




28. Clock the upper breather fitting so that it matches the picture. Locate the (3) supplied 4mm x 8 allen bolts and using a 3mm allen wrench thread the bolts thru the breather fitting into the AOS and secure the port fitting.



29. Using a 12mm socket and ratchet remove the 12mm bolt that secures the brake lines to the strut tower.

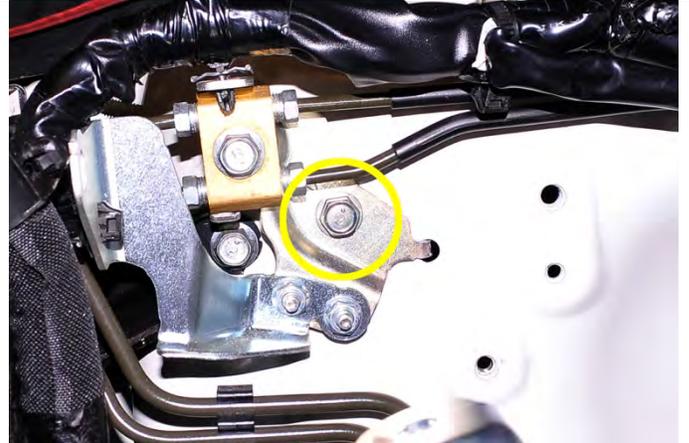

30. Install the AOS using the two holes on the strut tower shown in the picture. Guide the lower and upper coolant hose underneath the main wire harness while installing the AOS. Start the upper 13mm bolt first then start the lower 8mm bolt. Once both bolts have been slightly threaded use a 13mm and 8mm wrench to finish tightening them.

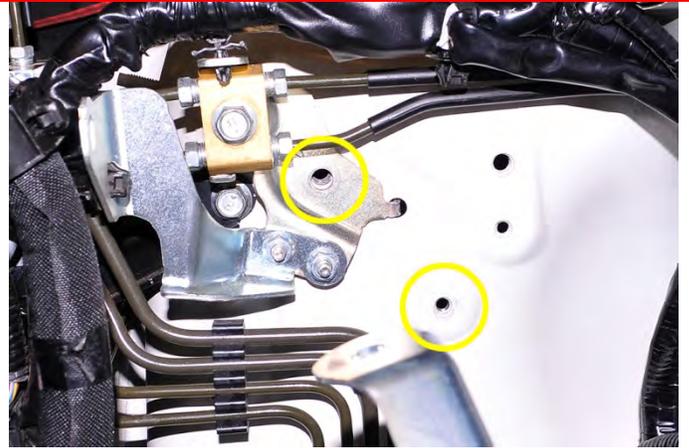

31. To minimize coolant loss, pinch off the coolant hose that connects the turbo to the engine coolant port and the lower coolant hose that connects to the EGR tube using hose clamping pliers.



32. Using needle nose pliers remove the spring clamp at the turbo coolant port. Next loosen the spring clamp on the coolant line at the engine and rotate the hose towards the strut tower so that it can meet up with the lower AOS coolant hose.





33. Slide the OEM coolant hose onto the lower AOS coolant hose straight fitting. Next using pliers and the OEM spring clamp secure the OEM hose to the fitting.

34. Slide the supplied spring clamp onto the end of the AOS upper coolant hose then route the hose as shown to the turbo coolant port. Secure the hose to the turbo coolant port with the spring clamp using pliers.



35. Remove all the hose clamping / pinching pliers.

***\* If you lost coolant you will have to top it off and bleed the coolant the system when the AOS install is complete.***

36. Locate the block breather / drain hose assembly.



Route the shorter of the two  $\frac{1}{2}$ " hoses thru the hole on the intercooler mounting bracket.



Pull the hose thru until the 90°  $\frac{5}{8}$ " hose lines up with the brass barb fitting on the engine block. Push the 90 degree  $\frac{5}{8}$ " hose onto the brass barb and secure it with a zip tie. Trim the excess off the zip tie.





37. Locate the supplied  $\frac{5}{8}$ " cap included with the AOS kit. Attach the cap to the lowest of the three AOS ports on the can. Secure the cap with a zip tie and trim off the excess.



38. Locate the AOS ½" oil drain line that runs thru the intercooler support bracket. Attach the line to the lower drain port on the AOS. Make sure the line is not kinked or obstructed. Secure the line with a zip tie and trim the excess.



39. Locate the AOS ½" breather hose and route it to the middle AOS can port. Secure the hose the can with a zip tie. Next secure the ½" breather hose to the small AC line at the fire wall. Make sure the line is free of kinks and is not obstructed. Trim the excess off the zip ties.





40. Reinstall the OEM EGR pipe and gasket using the (4) OEM 12mm bolts. Torque is 14ft. / lbs. \*Make sure before installing the EGR pipe that the OEM O-ring is in place on the intake manifold.



41. Locate the 1/2" AOS breather assembly. Install a zip tie loosely onto the short hose end of the breather hose assembly.





42. Route the long ½" breather assembly hose under the intake manifold towards the brake master cylinder.



Then attach the short  $\frac{1}{2}$ " hose with the loose zip tie to the block breather port under the AC compressor as shown. Secure the short hose with the zip tie and trim the excess.



43. Route the long portion of the  $\frac{1}{2}$ " breather hose along the firewall to the top  $\frac{1}{2}$ " port on the AOS as shown. Secure the hose with a zip tie at the port and onto the small AC line at the fire wall. Trim the excess off the zip ties.



44. Locate the  $\frac{3}{8}$ " x 21" length hose and install it onto the Street Series PCV valve. Install the remaining end onto the 90°  $\frac{3}{8}$ " fitting at the intake manifold as shown. Secure both ends with zip ties and trim the excess.



45. Locate the Street Series vent hose assembly.




Install the shorter of the two hoses coming off the “Y” fitting onto the upper AOS breather vent hose that is closest to the strut tower.



Next install the other short hose onto the remaining AOS vent port.



46. Route the long  $\frac{5}{8}$ " hose along the passenger side of the engine and along the front of the engine as shown.

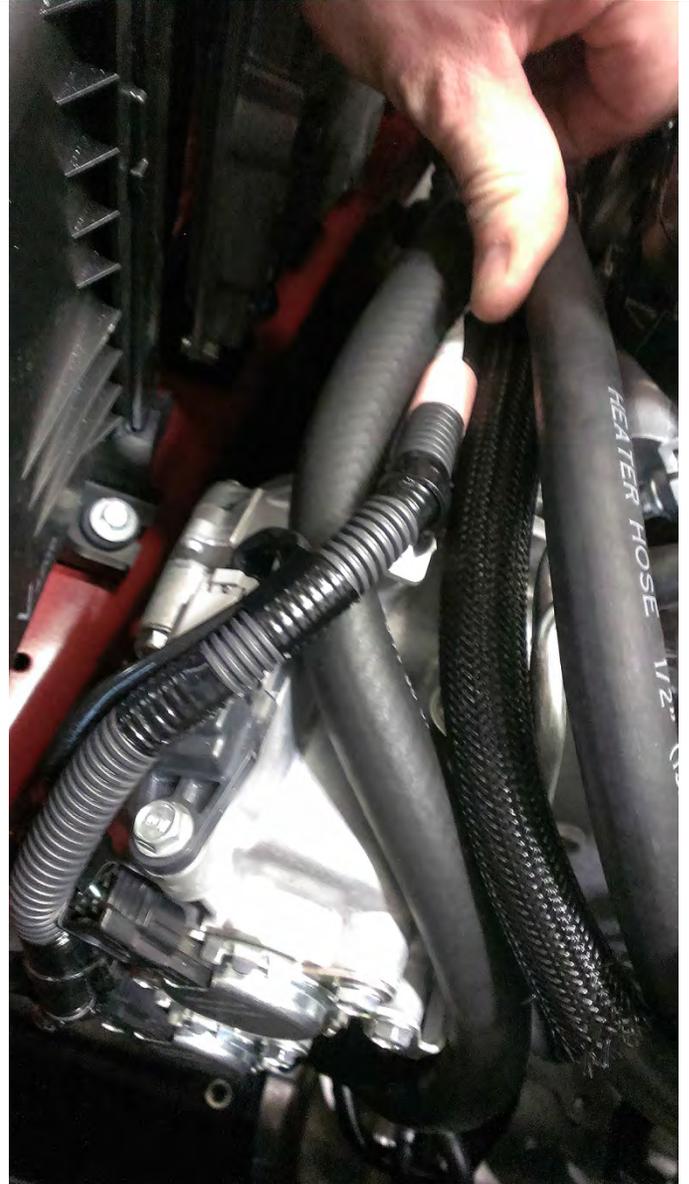

Route the hose down to the inlet port. Attach the hose to the inlet and secure it with a zip tie. Trim the excess off the zip tie.





47. Also secure the hoses at the passenger side of the engine using a zip tie as shown.



48. Reinstall the intercooler, boost pipe, intake air duct and engine cover using the OEM hardware. Reattach the negative battery terminal.





49. Before proceeding, please look over the check list below:

**Check Over List**

Are all coolant fittings tight?

Are (2) coolant clamps correctly fitted on the turbo coolant pipe and the expansion tank?

Was any coolant spilled in the engine bay cleaned up?

Are the hose clamps on the silicone couplers tight?

Are the following connections zip tied:

- ½" valve cover ports
- Both connections on the Y-fitting that is attached to the block
- All 3 side ports on the AOS
- The top breather port

50. After you have reviewed the check list, proceed to start the vehicle and check for leaks. After the engine has heat cycled, you can check the coolant level and replace any coolant that was lost during installation.