



U.S. BASED SUPPORT

HOURS: MONDAY - FRIDAY | 8AM - 5PM EST



[1.410.840.3555](tel:14108403555)




support@iagperformance.com



VIDEO INSTRUCTIONS

<https://www.youtube.com/watch?v=-mQ-6hl2GWc>



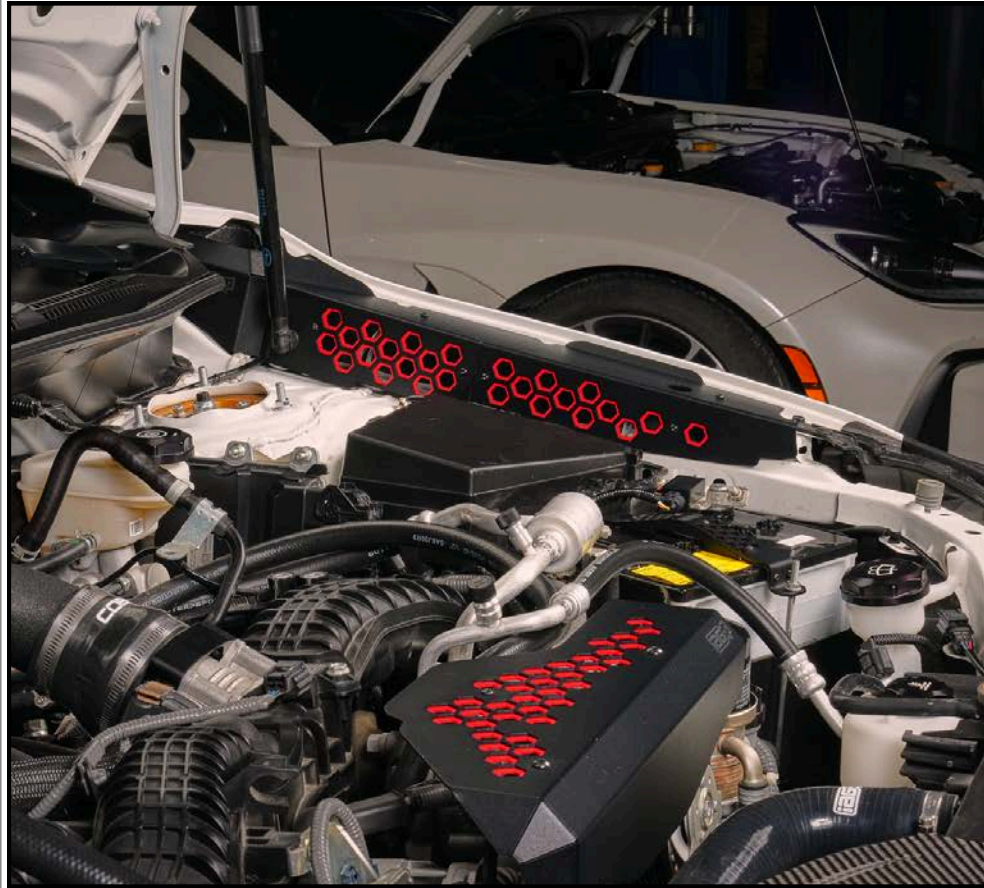

IAG VB Fender Shrouds For 2022+ WRX

IAG Fender Shrouds for 2022+ WRX

Part Number: IAG-ACC-2602

Congratulations on the purchase of your Fender Shrouds, and thank you for choosing IAG Performance! These instructions are intended for users with basic mechanical skills. Professional installation is not required.

Product includes:

1 (X2) Fender Shroud


2 (X4) Color Plates

3 (X4) Spacers

4 (X4) Rubber Rivet-Nut

5 (X8) 2.5mm Allen Bolt (Short)


6 (X4) 2.5mm Allen Bolt (Long)

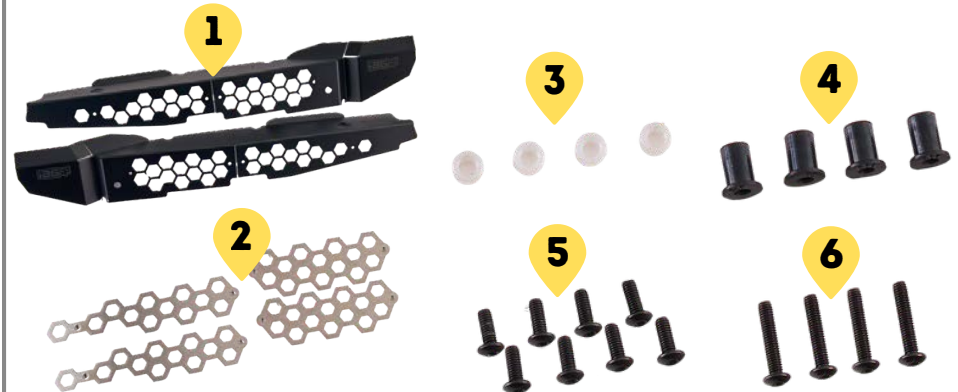


Tools Needed:

2.5mm Allen Wrench
12mm Socket/Wrench
Pocket Screwdriver
Hood Prop Rod




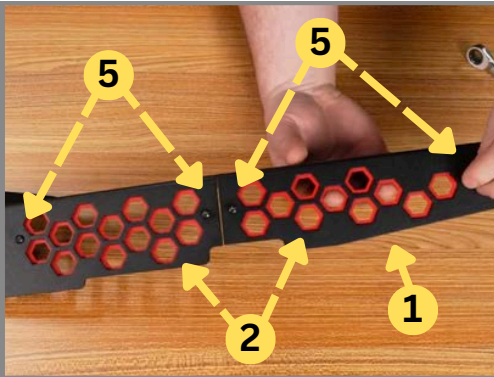


Step 1: Install the Color Plates to the Fender Shroud using four Short 2.5mm Allen Bolts.

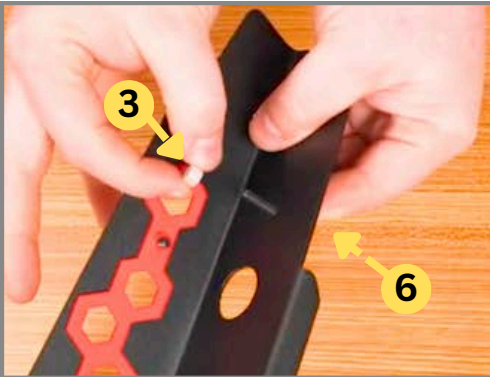


Step 2: Install Long 2.5mm Allen Bolt through the top of the Fender Shroud. Place Spacer on opposing side of Bolt.

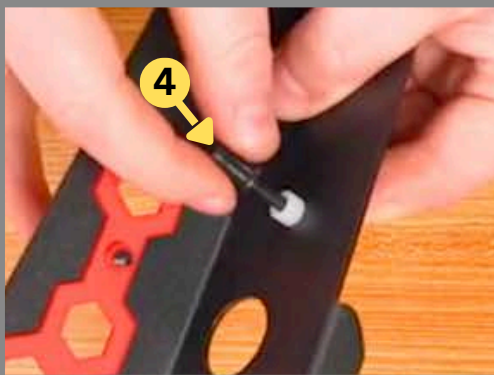

Step 3: Install Rivet-nut onto Allen Bolt. Thread on by hand but do not tighten. Repeat for both top bolts.

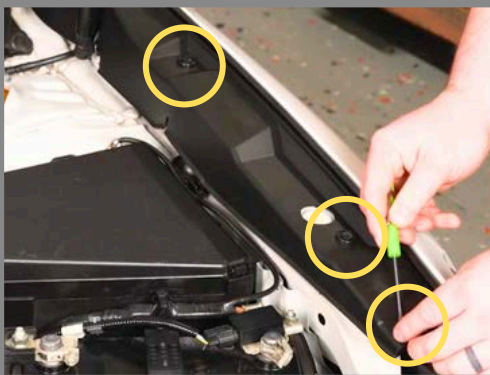

Step 4: Using a pocket Screw Driver, remove the three Push Clips from the factory Fender Shroud.

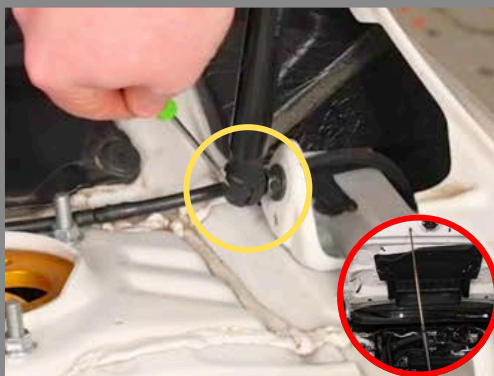


Step 5: Remove the Hood Strut from the bottom Ball Stud using a Screwdriver.
NOTE: Support Hood using Prop Rod



Step 6: Using a 12mm Socket, remove the Ball Stud from the Fender.



Step 7: Install the IAG Fender Shroud onto the Fender. Align the Rivet-nuts with the existing Push Clip holes.

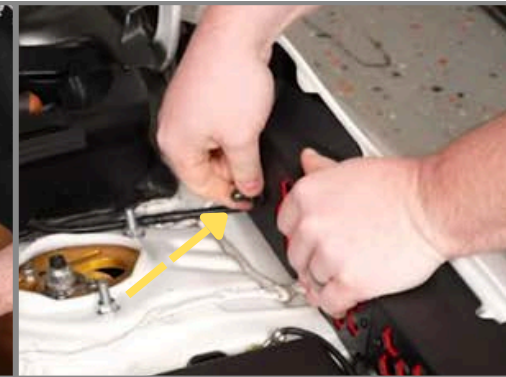

Step 8: Reinstall the Ball Stud, do not tighten at this time. Ensure that the Washer Fluid Hose is routed in the notch.



Step 9: Tighten the top Allen Bolts. Apply pressure to top of the Shroud to prevent the Riv-Nuts from spinning.



Step 10: Tighten the Ball Stud, then reinstall the Hood Strut. Repeat for other side.



If you have any questions about the installation or product please contact support@iagperformance.com or call 410-840-3555