



U.S. BASED SUPPORT

HOURS: MONDAY - FRIDAY | 8AM - 5PM EST



[1.410.840.3555](tel:14108403555)



support@iagperformance.com



VIDEO INSTRUCTIONS

<https://www.youtube.com/watch?v=Vcp1V8ALncM>





***IAG Billet Brake Fluid Cap For
02-24 WRX, 04-21 STI, 13-24 BRZ,
05-09 Legacy GT, 04-08 Forester XT***

IAG Billet Brake Fluid Cap

Part Number: IAG-ACC-5302

Congratulations on the purchase of your Brake Fluid Cap, and thank you for choosing IAG Performance! These instructions are intended for users with basic mechanical skills. Professional installation is not required.

Product includes:

- 1 IAG Brake Fluid Cap
- 2 Decorative Cap Insert



Tools Needed:

- Pocket Screwdriver
- Silicone Lubricant (Recommended)



Scan Me



Step 1: Remove factory brake fluid cap from brake fluid reservoir.



Step 2: Using a pocket screwdriver, remove the factory membrane from cap. Carefully pry up seal, do not damage.



Step 3: Prepare IAG Brake Fluid Cap. Install factory membrane into the cap. Make sure seal is fully seated.




Step 4: Prepare the Decorative Cap. Recommend applying a silicone lubricant to the O-Ring.



Step 5: Install the IAG Brake Fluid Cap onto the Brake Fluid Reservoir.



Step 6: Align Decorative Cap to the Brake Fluid Cap. Choose desired side to be displayed.

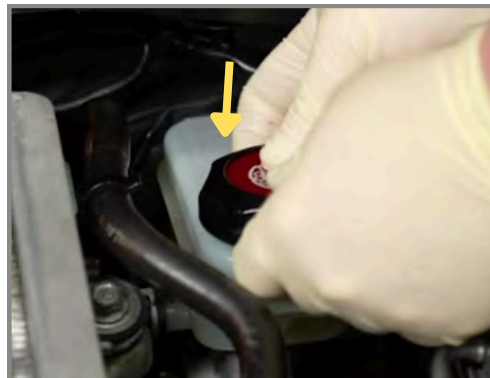

Step 7: Press the Decorative Cap into the Brake Fluid Cap using even pressure. Ensure the insert is fully seated.



Step 8: Finished!



If you have any questions about the installation or product please contact support@iagperformance.com or call 410-840-3555