



IAG Performance Standard Mount Tag Delete for 2015-17 WRX / STI

Part# IAG-BDY-3300BK, IAG-BDY-3300BL

Thank you for choosing the IAG Tag Delete. IAG recommends professional installation for this product. If you do the installation yourself, please reference the OE Service Manual for anything not covered in these instructions. If you do not own a Service Manual you can access and download the Subaru Service Manual for your car online at techinfo.subaru.com (\$34.95).




Parts List

Part Name	Quantity	Notes
IAG CNC Machined Tag Delete	1	
IAG Threaded Rubber Inserts	2	
IAG Anodized Aluminum 10/32-5/8" Allen Screw	2	
Allen Wrench 1/8"	1	

2015+ VA WRX STI Standard Mount


2. Make sure rubber nut is threaded on screw. It should be threaded until you just start feeling resistance.

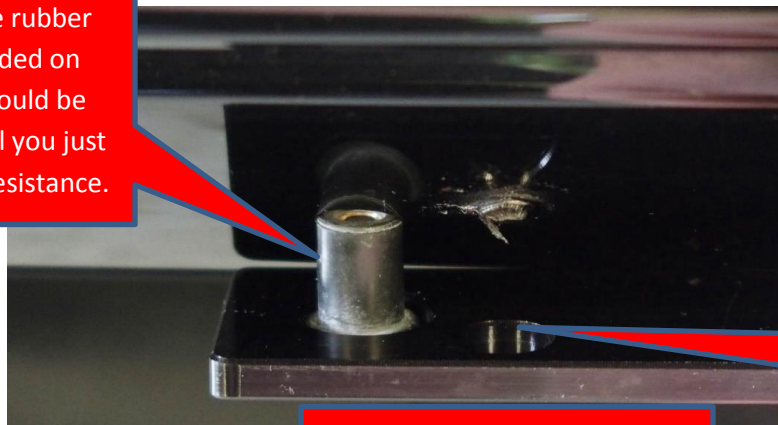


1. Align recess with existing holes in bumper.

3. Align rubber nuts to existing holes on the bumper and insert.



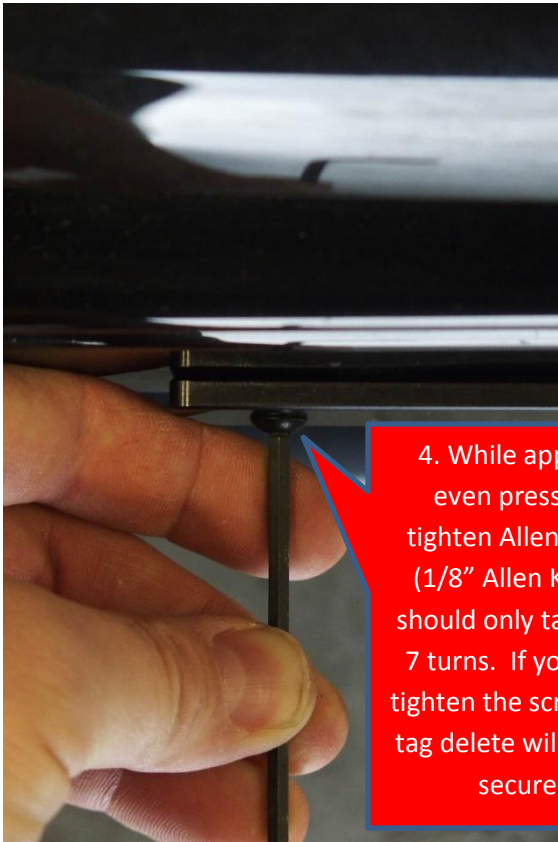

4. While applying even pressure, tighten Allen screw (1/8" Allen Key). I should only take 5 to 7 turns. If you over tighten the screw, the tag delete will not be secure.

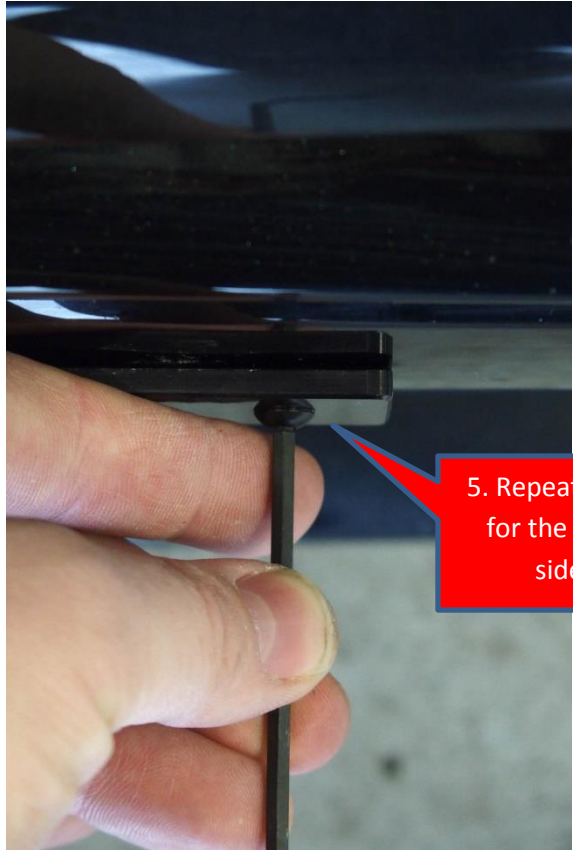

5. Repeat step 4 for the other side.



6. Finished